
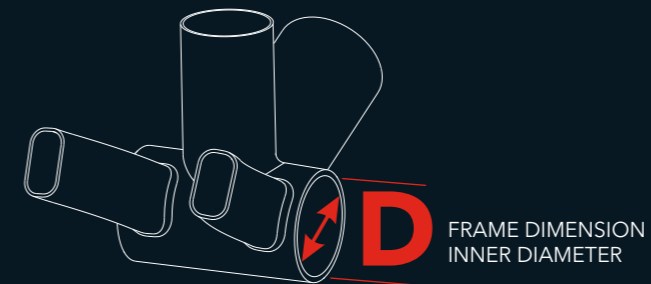


# ROTOR STANDARD DEVIATION BB COLLECTION ROAD BIKE

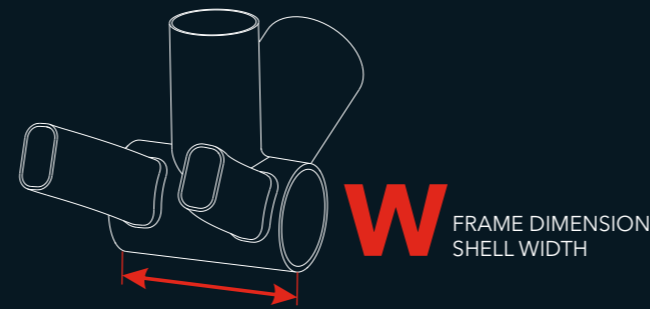

## IS YOUR FRAME THREADED?

THREADED BB		NON THREADED BB							
		D = 37 mm BB90	D = 41 mm	D = 42 mm		D = 46 mm			
		W = 68 mm BSA	W = 70 mm ITA	W = 86 mm BB86	W = 68 mm BB30	W = 79 mm BBRight California	W = 68 mm PressFit30	W = 79 mm BBRight PF	W = 86 mm BB386EVO
24 mm SPINDLE	BB1 BSA SABB BSA TRACK BSA  3D AGILIS (All Shimano compatible)	BB1 ITA SABB ITA TRACK BSA  3D AGILIS (All Shimano compatible)	3D AGILIS (All Shimano compatible)	Press Fit 4124  3D AGILIS (All Shimano compatible)	BB30 to 24 Road  3D AGILIS (All Shimano compatible)		Press Fit 4624 Road  3D AGILIS (All Shimano compatible)	BBRight 4624  3D AGILIS (All Shimano compatible)	
	BSA30  3D+	ITA30  3D+		Press Fit 4130  3D+	BB30 BEARING KIT  3D+	BB30 BEARING KIT  3D+	Press Fit 4630  3D+	Press Fit 4630  3D+	Press Fit 4630  3D+
30 mm SPINDLE									

UPGRADEYOURSELF



info@rotorbike.com  
rotorbike.com